

T2A63C-4 0,25KW 230/400V B3

Three-phase asynchronous motor in aluminum

Motor type T2A63C-4 0,25KW 230/400V B3
Brand BUSCK
Item number P3040631e


Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,25	50	1,23	1360
400	0,25	50	0,71	1360
460	0,29	60	0,71	1632

Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 1,76
Starting torque ratio 2,1
Pull up torque ratio 2
Pull out torque ratio 2,3
Starting current ratio 4

Efficiency, load 100% 68,5
Efficiency, load 75% 67,7
Efficiency, load 50% 62,7
Power fact, load 100% 0,74

Painting Standard
Color RAL 9005
Weight kg 5
Sound pressure Lp dB(A) 54
Bearing DE 6201 2RZ C3
Bearing NDE 6201 2RZ C3
Balance grade Normal
Inertia kgm² 0,0003987637
Cable entries 1xM20

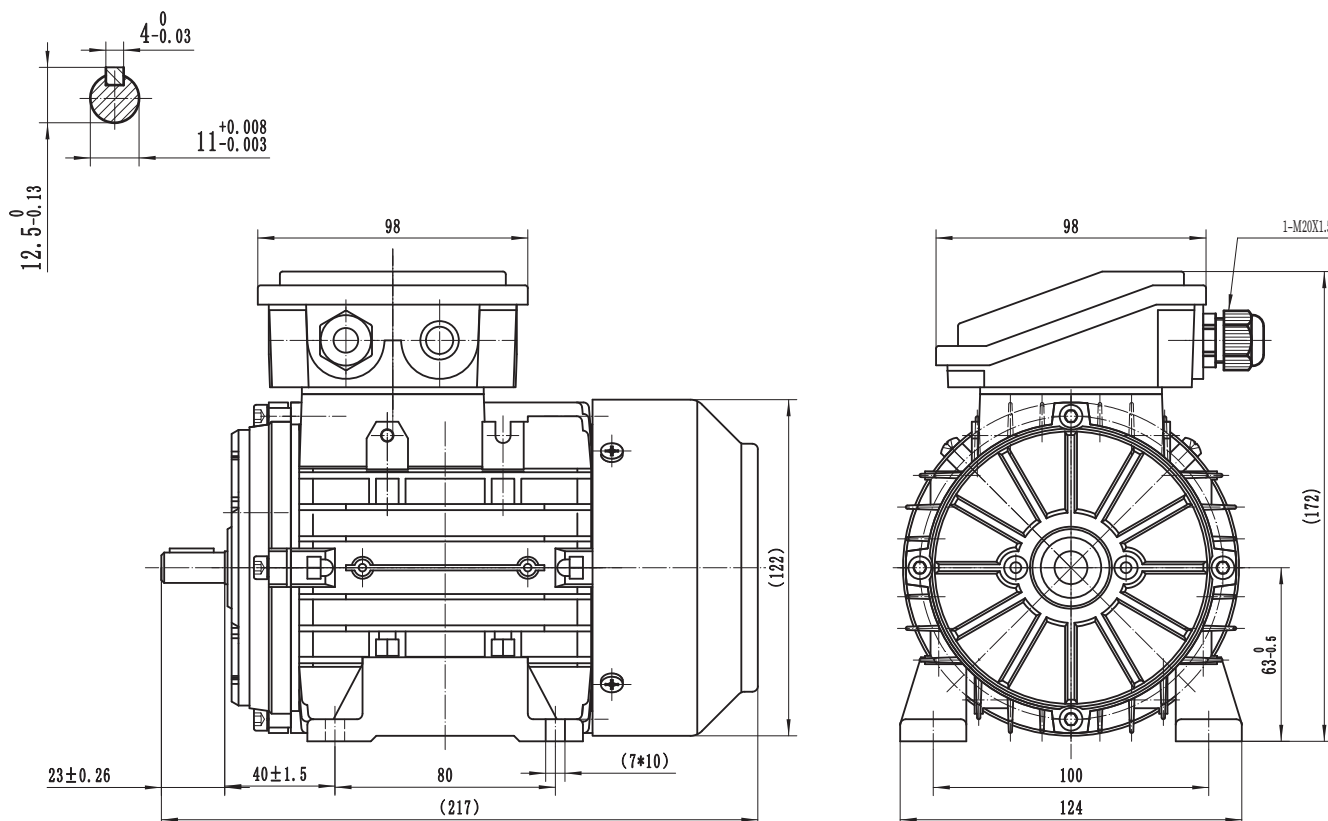

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no