

T2A63C-4 0,25KW 230/400V B5


Three-phase asynchronous motor in aluminum

Motor type T2A63C-4 0,25KW 230/400V B5
Brand BUSCK
Item number P3040632e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,25	50	1,23	1360
400	0,25	50	0,71	1360
460	0,29	60	0,71	1632

Duty	S1	Efficiency, load 100%	68,5
Enclosure	IP55	Efficiency, load 75%	67,7
Insulation class	F	Efficiency, load 50%	62,7
Cooling	IC411 (TEFC)	Power fact, load 100%	0,74
Max. ambient temp.	40°C	Painting	Standard
Min. ambient temp.	-20°C	Color	RAL 9005
Max. temp. rise	80 K	Weight kg	5
Max altitude, masl	1000	Sound pressure Lp dB(A)	54
Torque, Nm	1,76	Bearing DE	6201 2RZ C3
Starting torque ratio	2,1	Bearing NDE	6201 2RZ C3
Pull up torque ratio	2	Balance grade	Normal
Pull out torque ratio	2,3	Inertia kgm ²	0,0003987637
Starting current ratio	4	Cable entries	1xM20

Note Cable gland M20

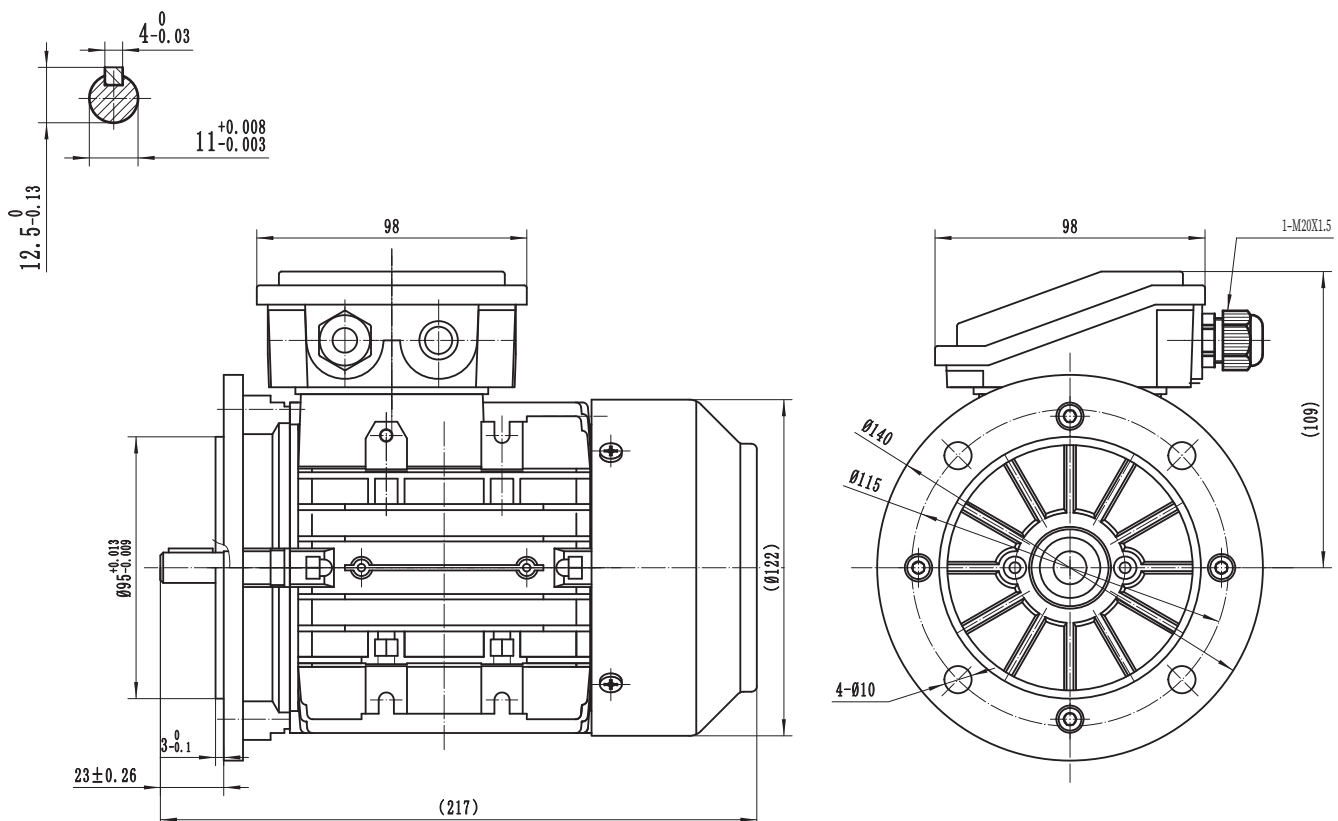

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no