

T3A71C-2 0,75KW 230/400V B34

Three-phase asynchronous motor in aluminum

Motor type T3A71C-2 0,75KW 230/400V B34
Brand BUSCK
Item number P3020715

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,75	50	2,85	2870
400	0,75	50	1,64	2870
460	0,86	60	1,64	3444




Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 2,5
Starting torque ratio 3
Pull up torque ratio 2,2
Pull out torque ratio 3,2
Starting current ratio 7,1
Winding protection Thermocontacts

Efficiency class IE3
Efficiency, load 100% 80,7
Efficiency, load 75% 80,8
Efficiency, load 50% 78,2
Power fact, load 100% 0,82

Painting Standard
Color RAL 9005
Weight kg 7,1
Sound pressure Lp dB(A) 65
Bearing DE 6202 2RZ C3
Bearing NDE 6202 2RZ C3
Balance grade Normal
Inertia kgm² 0,000606
Cable entries 1xM20

Note IE3, Termokontakter

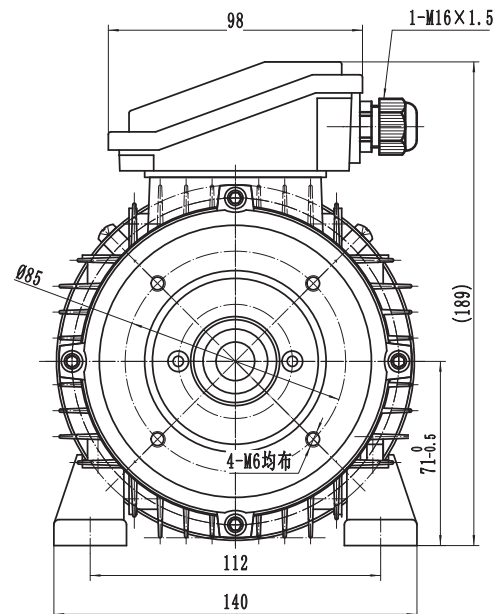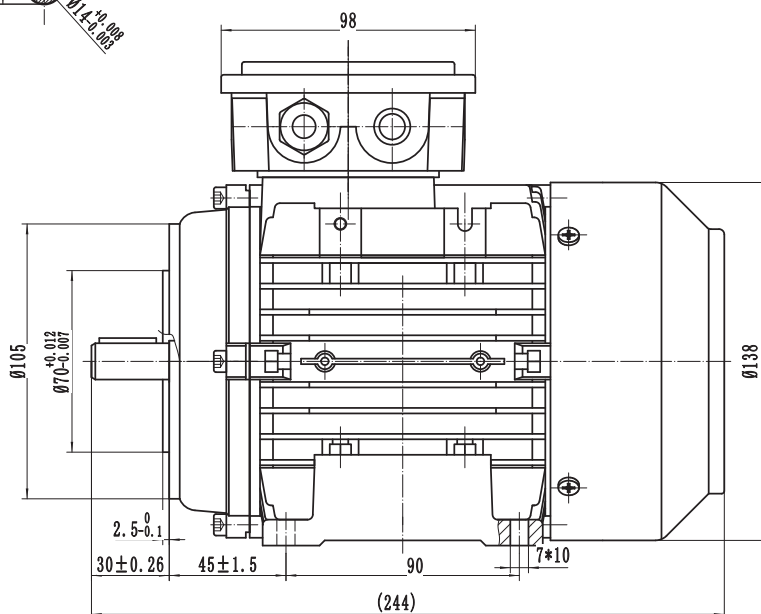

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no