

T3A90L-4 1,5KW 230/400V B14

Three-phase asynchronous motor in aluminum

Motor type T3A90L-4 1,5KW 230/400V B14
Brand BUSCK
Item number 93040913


Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	1,5	50	5,97	1430
400	1,5	50	3,43	1430
460	1,73	60	3,43	1716

Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 10,02
Starting torque ratio 3,4
Pull up torque ratio 2,8
Pull out torque ratio 3,3
Starting current ratio 7,1
Balance grade Normal
Inertia kgm² 0,00468546
Winding protection Thermocontacts

Efficiency class IE3
Efficiency, load 100% 85,3
Efficiency, load 75% 85,5
Efficiency, load 50% 84,1
Power fact, load 100% 0,74

Painting Standard
Color RAL 9005
Weight kg 18
Sound pressure Lp dB(A) 61
Bearing DE 6205-2Z
Bearing NDE 6205-2Z

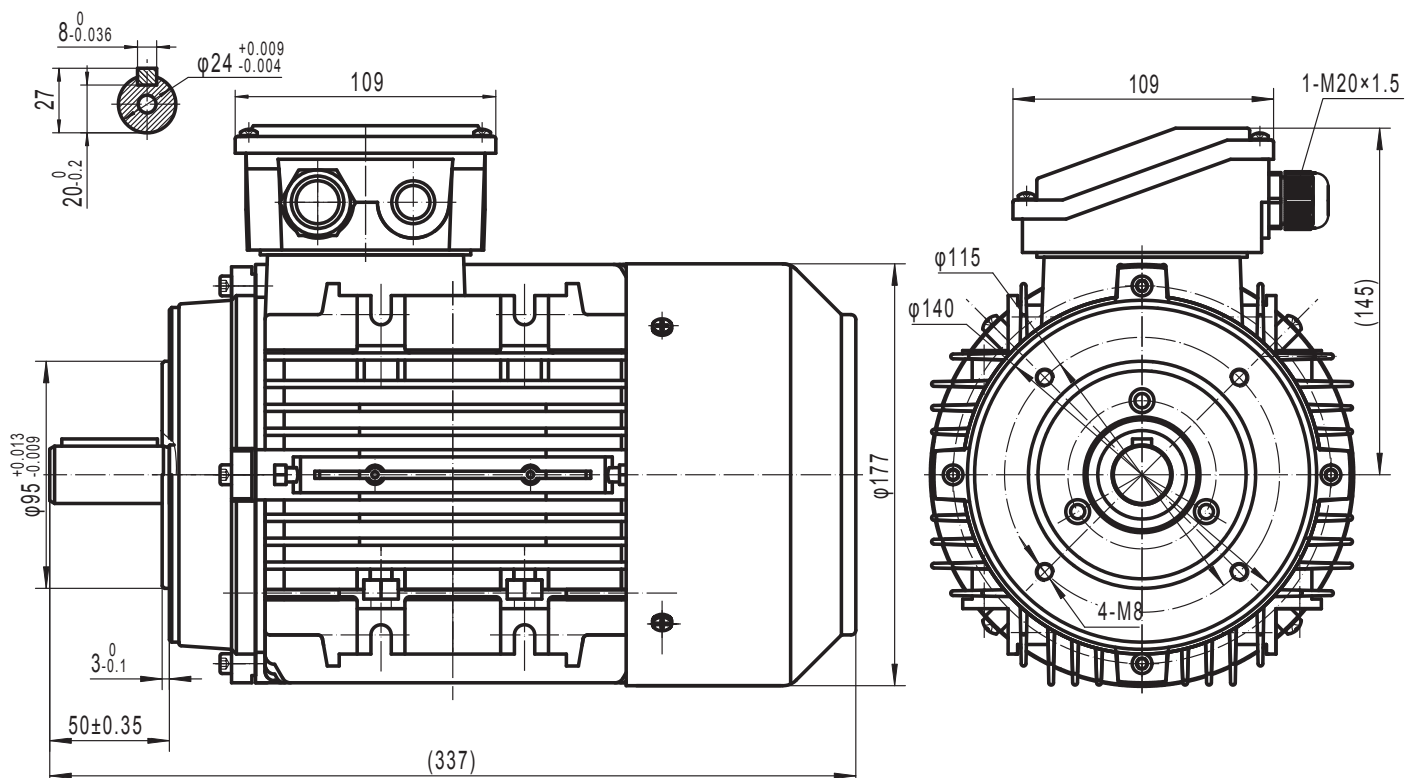

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no