

T3CR160M-4 11KW 400/690V B5



Three-phase asynchronous motor in cast iron

Motor type T3CR160M-4 11KW 400/690V B5
Brand BUSCK
Item number 93041602T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	11	50	20,7	1450
690	11	50	11,89	1450
460	12,65	60	20,7	1740

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	91,4
Insulation class	F	Efficiency, load 75%	92,2
Cooling	IC411 (TEFC)	Efficiency, load 50%	91,7
Max. ambient temp.	40°C	Power fact, load 100%	0,84
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	127
Torque, Nm	72,45	Sound pressure Lp dB(A)	75
Starting torque ratio	2,5	Bearing DE	6309 C3
Pull up torque ratio	1,3	Bearing NDE	6309 C3
Pull out torque ratio	3	Balance grade	Normal
Starting current ratio	10	Inertia kgm ²	0,10355
Winding protection	Thermistors	Cable entries	2xM32, 1xM16

Note IE3

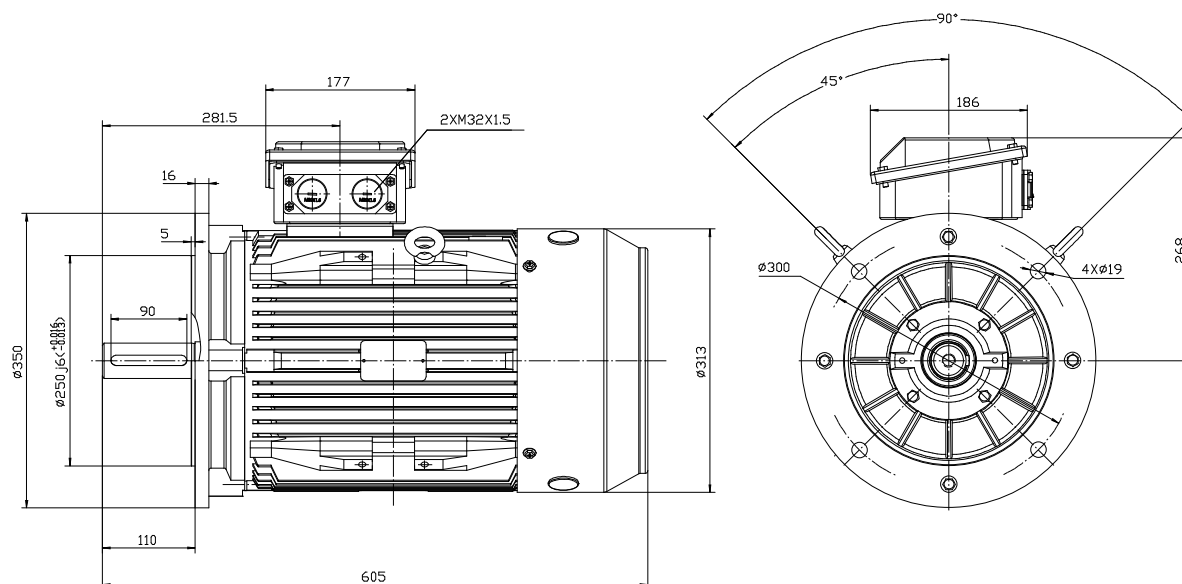

TC 160M B5

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no